

TECHNICAL SPECIFICATION

TFX
TILE FLASHING



16-50 mm

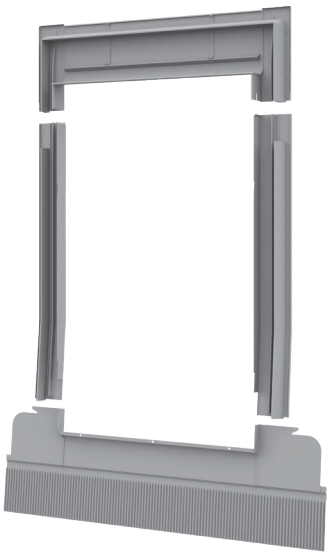

FEATURES
Perfect watertightness
Easy installation
Weather and UV ray resistant
Lead free
Foam gasket
Aluminium apron to ensure a perfect seal to profiled roofing materials







APPLICABLE
In roof pitch range of 15-90°
Tile profile height 16-50 mm

MATERIAL
Aluminium
Powder coated grey, RAL 7043

FLASHING SELECTION GUIDE	
WINDOW SIZE CODE	**FLASHING CODE**
C2A	TFX C2A
C4A	TFX C4A
F6A	TFX F6A
M4A	TFX M4A
M6A	TFX M6A
M8A	TFX M8A
S6A	TFX S6A