
TECHNICAL SPECIFICATION



UFX


UNIVERSAL FLASHING

16-120 mm

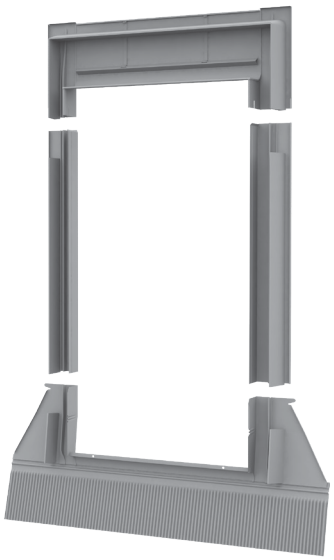

FEATURES
Perfect watertightness
Easy installation
Weather and UV ray resistant
Lead free
Foam gasket
Extra long apron to ensure a perfect seal to high profiled roofing materials



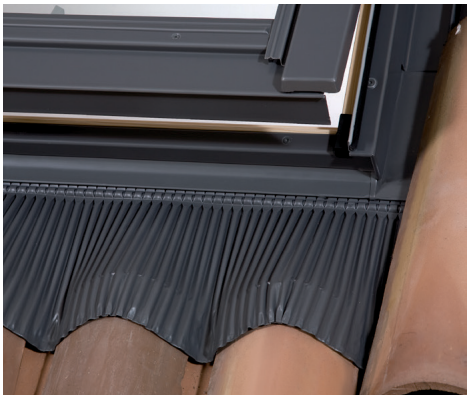



APPLICABLE
In roof pitch range of 15-90°
Tile profile height 16-120 mm

MATERIAL
Aluminium
Powder coated grey, RAL 7043

FLASHING SELECTION GUIDE	
WINDOW SIZE CODE	**FLASHING CODE**
C2A	UFX C2A
C4A	UFX C4A
F6A	UFX F6A
M4A	UFX M4A
M6A	UFX M6A
M8A	UFX M8A
S6A	UFX S6A